

**Cycoloy\* Resin C1200HF**  
**Americas: COMMERCIAL**

PC+ABS, excellent flow/impact/high heat resistance. Low temperature ductility. For automotive, appliance and electrical components.

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>MECHANICAL</b>			
Tensile Stress, yld, Type I, 50 mm/min	580	kgf/cm <sup>2</sup>	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	5	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	150	%	ASTM D 638
Tensile Modulus, 50 mm/min	23200	kgf/cm <sup>2</sup>	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	890	kgf/cm <sup>2</sup>	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	23900	kgf/cm <sup>2</sup>	ASTM D 790
<b>IMPACT</b>			
Izod Impact, notched, 23°C	59	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	49	cm-kgf/cm	ASTM D 256
Instrumented Impact Total Energy, 23°C	553	cm-kgf	ASTM D 3763
Instrumented Impact Total Energy, -30°C	553	cm-kgf	ASTM D 3763
<b>THERMAL</b>			
HDT, 0.45 MPa, 3.2 mm, unannealed	129	°C	ASTM D 648
HDT, 1.82 MPa, 3.2mm, unannealed	112	°C	ASTM D 648
CTE, -40°C to 40°C, flow	7.2E-05	1/°C	ASTM E 831
Vicat Softening Temp, Rate B/50	130	°C	ISO 306
Relative Temp Index, Elec	105	°C	UL 746B
Relative Temp Index, Mech w/impact	80	°C	UL 746B
Relative Temp Index, Mech w/o impact	105	°C	UL 746B
<b>PHYSICAL</b>			
Specific Gravity	1.15	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm (5)	0.5 - 0.7	%	SABIC Method
Melt Flow Rate, 260°C/5.0 kgf	19	g/10 min	ASTM D 1238

<sup>1</sup> Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

<sup>2</sup> Only typical data for material selection purpose. Not to be used for part or tool design.  
<sup>3</sup> This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
<sup>4</sup> Own measurement according to UL.  
<sup>5</sup> Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布，我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

**Cycology\* Resin C1200HF**  
**Americas: COMMERCIAL**

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>ELECTRICAL</b>			
Hot Wire Ignition {PLC}	3	PLC Code	UL 746A
High Ampere Arc Ign, surface {PLC}	1	PLC Code	UL 746A
Comparative Tracking Index (UL) {PLC}	2	PLC Code	UL 746A
<b>FLAME CHARACTERISTICS</b>			
UL Recognized, 94HB Flame Class Rating (3)	1.19	mm	UL 94

<sup>1</sup> Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 230C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

<sup>2</sup> Only typical data for material selection purpose. Not to be used for part or tool design.  
<sup>3</sup> This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
<sup>4</sup> Own measurement according to UL.  
<sup>5</sup> Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布, 我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

**Cycoloy\* Resin C1200HF**  
**Americas: COMMERCIAL**

PROCESSING PARAMETERS	TYPICAL VALUE	UNIT
<b>Injection Molding</b>		
Drying Temperature	100 - 110	°C
Drying Time	3 - 4	hrs
Drying Time (Cumulative)	8	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	275 - 300	°C
Nozzle Temperature	275 - 300	°C
Front - Zone 3 Temperature	260 - 300	°C
Middle - Zone 2 Temperature	255 - 295	°C
Rear - Zone 1 Temperature	250 - 290	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	60 - 90	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	40 - 70	rpm
Shot to Cylinder Size	30 - 80	%
Vent Depth	0.038 - 0.076	mm

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.  
All properties, except the melt volume rate are measured on injection moulded samples.  
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.


Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布，我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

**Cycloloy\* Resin C1200HF**  
**Americas: COMMERCIAL**

**CALCULATED FLOW LENGTH INDICATION**  
**Moldflow® Radial Flow Analysis**  
**Cycloloy® C1200HF**  
**Melt Temperature : 275°C**  
**Mold Temperature : 75°C**

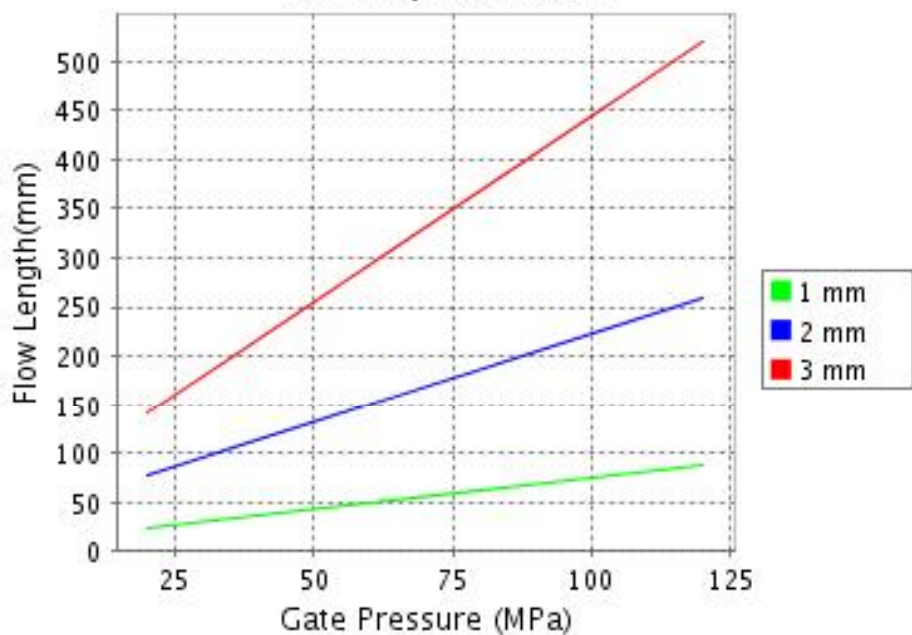

**Note: Technical**

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.

3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.

4) Own measurement according to UL.

5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布, 我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！